


Drain plugs for Ex e application

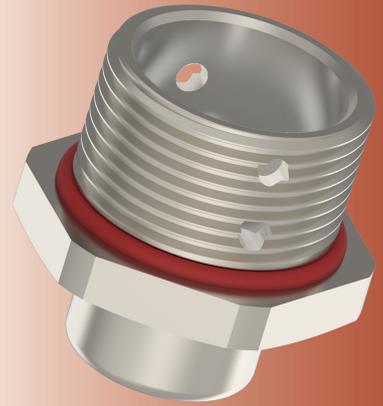

Drain Plug		
<ul style="list-style-type: none"> Effectively draining moisture out off an enclosure. Prevents damages, such as condensation water. Allows the air inside the enclosure to breathe with the surrounding atmosphere. 		
Technical Details		
Material	Body ,Cap: Brass, Brass Nickel Plated, Stainless Steel 316L Membrane: Bronze O-Ring: Silicone	
Ingress Protection Rating	IP 66	
Operating Temperature	Seal Material Silicone	
Ex e/tb	-60°C to +85°C	
Equipment For	• Gas & Dust potentially explosive atmospheres.	
Suitable for use in	Group II Gas Group IIC ZONE1/ZONE2 Group III Dust Group IIIC ZONE21/ZONE 22	
Equipment Marking	Ex II 2GD Ex eb IIC Gb Ex tb IIIC Db IP66	
Marking Example *	BMD BDRV... CE 0722 Ex II 2GD Ex eb IIC Gb Ex tb IIIC Db Ta -60°C to +85°C IP66 IMQ 13 ATEX 030X IECEx IMQ 14.0003X	
Type Protection	Ex eb ; Ex tb	
Thread Type	• Metric (M) ISO Pitch 1,5 • Npt (N) ANSI ASME B1.20.1	
Accessories	• Lock Nut	
Remarks	• O-ring available in Metric outer threads. • Accessories must be ordered separately.	
Approvals	Certificate Number	Standards
	IMQ 13 ATEX 030X	EN 60079-0:2012+A11:2013 EN 60079-7:2015 EN 60079-31:2014
	IECEx IMQ 14.0003X	IEC 60079-0:2011 Edition:6 IEC 60079-31:2013 Edition:2 IEC 60079-7:2015 Edition:5
	№ TC RU C-TR.AA87.B.00941	ГОСТ 31610.0-2014 ГОСТ IEC 60079-1:2013 ГОСТ IEC 60079-31:2013

-For details of approvals, see our website.
* The standard marking consists ATEX & IECEx only. Marking acc. to other standards on request.


Ideally it should be located at the lowest point of the housing to ensure optimum draining.

Threaded Hole



Non-Threaded Hole


Special Lock Nut
for Drain Plug

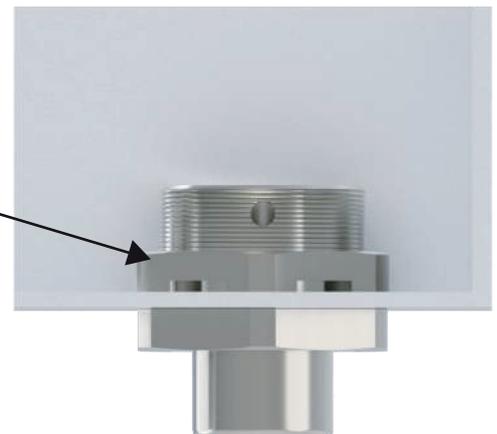

Order Coding				
Part Number	Material	Seal	-	Lock Nut
Mandatory	Mandatory	Mandatory	-	Option
See table	B Brass BN Brass Nickel Plated X Stainless steel 316L	S Silicone	-	L Lock Nut
Example				
BDRV-1M	BN		-	



VIRGO

Drain Plugs Ex e applications

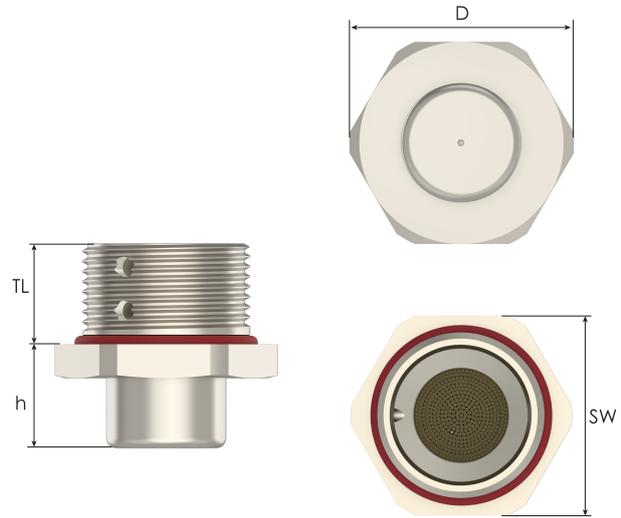

Thread Type METRIC acc. to ISO 965-3					
Outer Thread Size (Male)	Outer Thread Length	Spanner Width	Outer Ø	Height	Part Number
	TL mm	SW mm	D2 mm	h mm	
M20x1,5	15,0	25	27,5	16,0	BDRVY-1M
M25x1,5	15,0	30	33,0	16,0	BDRVY-2M

Thread Type NPT acc. to ANSI ASME B1.20.1					
Outer Thread Size (Male)	Outer Thread Length	Spanner Width	Outer Ø	Height	Part Number
	TL mm	SW mm	D2 mm	h mm	
NPT 1/2"	16,0	25	27,5	16,0	BDRVY-1N
NPT 3/4"	16,0	30	33,0	16,0	BDRVY-2N

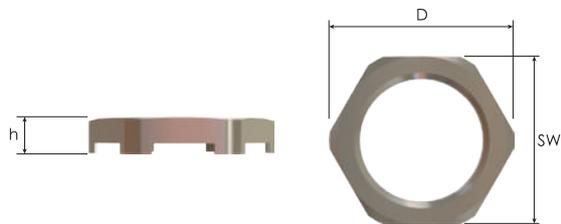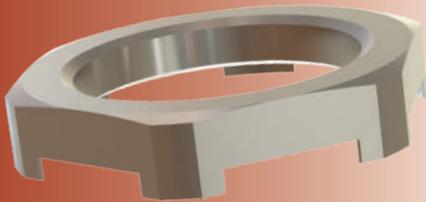

Special Lock Nuts for Drain Plugs

Inner Thread Size (Female)	Spanner Width	Outer Ø	Height	Part Number
	SW mm	D2 mm	h mm	
M20x1,5	25	27,5	5,0	BDRL-03
M25x1,5	30	33,0	5,0	BDRL-04
NPSL 1/2"	25	27,5	5,0	BDRLN-03
NPSL 3/4"	30	33,0	5,0	BDRLN-04