


Technical Data Sheet - Cable Protection Glands, Plastic


General

Designed with anti-kink features to minimize the risk of sharp bending of flexible cables, helping to prevent conductor fatigue and damage
Suitable for dynamic applications where cables are subjected to frequent movement or flexing
Designed for use with non-armoured cables, conforming to EN 62444 and UL514B standards
Applicable for both outdoor and indoor use in industrial areas.
High protection against dust, moisture, and water ingress
High tensile strength and reliable strain relief
Durable design with quick and easy assembly

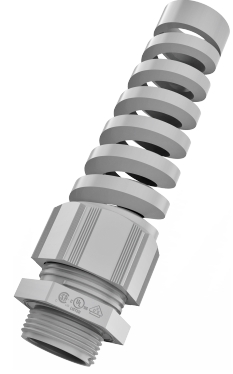

Technical

Cap/Body Material	Polyamide 6 V2 acc. to UL 94
Seal Material	Neoprene (Chloroprene)
Ingress Protection Rating	IP68 - 5 Bar 30 min, IP66
Type Rating	1, 4, 4x, 12, 13
Temperature Range	Permanent -20 °C to +100 °C Intermittent -40 °C to +150 °C
Colour	Silver grey (RAL 7001) Light grey (RAL 7035) Black (RAL 9005)
Thread Type	Metric, PG, NPT, PF/G (GAS)
Cable Type	Non-Armoured Locknut Reducing seal Double seal Flat cable seal
Accessories	

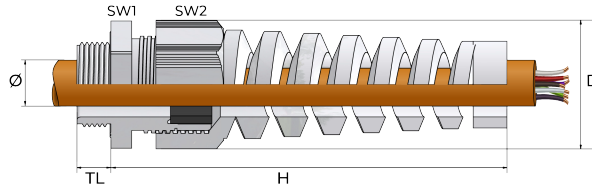

Thread Size	Cable Ø	TL	SW 1/2	Outer Ø 'D'	Max. Height 'H'	MOQ	RAL 7035	RAL 7001	RAL 9005
PG 7	3.0 - 6.5	8.0	15/15	16.6	58.0	2000	BSSP-11	BSSP-01	BSSP-21

Certificates



Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzbaşı Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye

T: +90 212 875 73 76

bimedteknik.com

info@bimedteknik.com

